



**BUREAU  
VERITAS**

En février 2026, le laboratoire indépendant et accrédité Bureau Veritas a analysé un échantillon de fioul lourd HFO 380 amélioré avec la **Technologie des Enzymes XBEE**. L'analyse démontre que ce carburant pour les moteurs HFO/IFO 380 est en conformité avec la norme ISO 8217:2017.

Conclusions :

*Les essais ont été réalisés après incorporation d'une dose volumétrique de 1/4000 de l'additif XBEE suivie, d'une période de conservation de l'échantillon à température constante de deux semaines. L'échantillon additivé par la technologie XBEE est conforme aux limites fixées par les spécifications techniques du carburant marine RMG 380 de la norme ISO 8217:2017.*

Analyses	Normes	Avec XBEE	Sans XBEE	Unités	Limites
Densité à 15°C	ASTM D 4052	956.8	956.8	kg/m <sup>3</sup>	991.00 max
Résidu de carbone MCC	ASTM D 4530	11.9	11.9	% (m/m)	18.00 max
Viscosité à 50°C	ASTM D 445	633.9	646.9	mm <sup>2</sup> /s	-
Point éclair	ASTM D 93	>110.0	>110.0	°C	60 min
Soufre	EN ISO 8754	1.84	1.83	% (m/m)	1.50 max
Cendres	ASTM D 482	0.039	0.062	% (m/m)	0.10 max
Teneur en eau	ASTM D 95	<0.05	0.05	% vol	0.50 max
Point d'écoulement	ASTM D 97	+24	+24	°C	30 max
Acidité	ASTM D 664	0.10	0.10	mgKOH/g	2.5 max
Sulfure d'hydrogène (H <sub>2</sub> S)	IP 570-Proc. A	<0.60	<0.60	mg/kg	2.00 max
CCAI	Ref. Annex F	813	813	cotation	870.00 max
Sédiments totaux par filtration	ISO 10307-2	0.01	0.02	% (m/m)	0.10 max
Aluminium (Al) + Silicone (Si)	IP 501	<15	<15	mg/kg	60 max
Sodium (Na)	IP 501	40	38	mg/kg	100 max
Calcium (Ca)	IP 501	3	3	mg/kg	30 max
Zinc (Zn)	IP 501	18	17	mg/kg	15 max
Vanadium (Va)	IP 501	97	102	mg/kg	350 max
Phosphore	IP 501	3	<1	mg/kg	15 max

# Annexes

Rapports originaux



**BUREAU  
VERITAS**



## Certificate of Analysis

Our ref	<b>BEANT-25-11573-XXV1999882</b>	Asset	<b>Submitted Sample</b>
Location	<b>Not specified</b>	Seals	<b>None</b>
Product	<b>HFO 380</b>	Packed	<b>Plastic</b>
Reference id	<b>XBEE</b>	Submitted by	<b>Ourselves</b>
Sample received	<b>13-02-2026</b>	End of analysis	<b>15-02-2026</b>
Subject	<b>Submitted samples</b>		
Sample from	<b>Sample as received</b>		

Test	Method	Unit	Result
Density at 15 °C (a)	ASTM D4052	kg/m <sup>3</sup>	956.8
Micro Carbon Residue	ASTM D4530	% m/m	11.9
Viscosity at 50 °C (a)	ASTM D445	mm <sup>2</sup> /s	633.9
Flash Point PM - Proc. B (a)	ASTM D93	Deg C	>110
Sulphur (EDF) (a)	EN ISO 8754	% m/m	1.84
Ash Content	ASTM D482	% m/m	0.039
Water by Distillation	ASTM D95	% v/v	<0.05
Pour Point	ASTM D97	Deg C	24
Acid number	ASTM D664	mg KOH/g	0.10
Hydrogen Sulphide	IP 570 - Proc. A	mg/kg	<0.60
CCAI	ref Annex F		813
Total Sediments - Potential	ISO 10307-2	% m/m	0.01
Metals	IP 501	-	-
Vanadium (V) - ICP	-	mg/kg	97
Sodium (Na) - ICP	-	mg/kg	40
Aluminium (Al) - ICP	-	mg/kg	5
Silicon (Si) - ICP	-	mg/kg	<10
Aluminium + Silicon (Al+Si)	-	mg/kg	<15
ULO metals content (a)	-	-	free of
_Zinc (Zn) - ICP	-	mg/kg	18
_Phosphorus (P) - ICP	-	mg/kg	<1
_Calcium (Ca) - ICP	-	mg/kg	3

Unless specified, the latest version at our disposal of the test methods has been used.  
The results relate only to the items tested.

AUTHORIZATION

Dario D'Heldt (Chemist)

Certified to ISO 9001  
Trade Register Antwerp 333.309  
VAT nr. BE 0465.326.123

All tests marked by (a)  
are accredited by  
BELAC ref. 486-TEST  
ISO/IEC 17025



All services are rendered in accordance with Bureau Veritas's General Terms and Conditions of Business, available on request or at <https://commodities.bureauveritas.com/general-conditions-of-service>.  
Laboratory Measurement Uncertainties are not taken into account for the evaluation of specification limits. If product is outside method scope; precision and accuracy of result cannot be guaranteed.

Method Validation data is available upon request.

Bureau Veritas Commodities Antwerp NV  
Romeynsweel 14  
2030 Antwerp  
Belgium

T: +32 (0)3 546 08 88  
E: [labco@bureauveritas.com](mailto:labco@bureauveritas.com)  
[commodities.bureauveritas.com](http://commodities.bureauveritas.com)



**BUREAU  
VERITAS**



## Certificate of Analysis

Our ref	<b>BEANT-25-11573-XXV1999882</b>	Asset	<b>Submitted Sample</b>
Location	<b>Not specified</b>	Seals	<b>None</b>
Product	<b>HFO 380</b>	Packed	<b>Plastic</b>
Reference id	<b>XBEE</b>	Submitted by	<b>Ourselves</b>
Sample received	<b>13-02-2026</b>	End of analysis	<b>15-02-2026</b>
Subject	<b>Submitted samples</b>		
Sample from	<b>Sample as received</b>		



AUTHORIZATION

Dario D'Heldt (Chemist)

Certified to ISO 9001  
Trade Register Antwerp 333.309  
VAT nr. BE 0465.326.123

All tests marked by (a)  
are accredited by  
BELAC ref. 486-TEST  
ISO/IEC 17025



All services are rendered in accordance with Bureau Veritas's General Terms and Conditions of Business, available on request or at <https://commodities.bureauveritas.com/general-conditions-of-service>.  
Laboratory Measurement Uncertainties are not taken into account for the evaluation of specification limits. If product is outside method scope; precision and accuracy of result cannot be guaranteed.

Method Validation data is available upon request.



**BUREAU  
VERITAS**



## Certificate of Analysis

Our ref	<b>BEANT-25-11573-XXV1999884</b>	Asset	<b>Submitted Sample</b>
Location	<b>Not specified</b>	Seals	<b>None</b>
Product	<b>HFO 380 with XBEE additive</b>	Packed	<b>Plastic</b>
Reference id	<b>XBEE</b>	Submitted by	<b>Ourselves</b>
Sample received	<b>13-02-2026</b>	End of analysis	<b>13-03-2026</b>
Subject	<b>Submitted samples</b>		
Sample from	<b>Sample as received</b>		

Test	Method	Unit	Result
Density at 15 °C (a)	ASTM D4052	kg/m <sup>3</sup>	956.8
Micro Carbon Residue	ASTM D4530	% m/m	11.9
Viscosity at 50 °C (a)	ASTM D445	mm <sup>2</sup> /s	646.9
Flash Point PM - Proc. B (a)	ASTM D93	Deg C	>110.0
Sulphur (EDF) (a)	EN ISO 8754	% m/m	1.83
Ash Content	ASTM D482	% m/m	0.062
Water by Distillation	ASTM D95	% v/v	0.05
Pour Point	ASTM D97	Deg C	24
Acid number	ASTM D664	mg KOH/g	0.10
Hydrogen Sulphide	IP 570 - Proc. A	mg/kg	<0.60
CCAI	ref Annex F		813
Total Sediments - Potential	ISO 10307-2	% m/m	0.02
Metals	IP 501	-	-
Vanadium (V) - ICP	-	mg/kg	102
Sodium (Na) - ICP	-	mg/kg	38
Aluminium (Al) - ICP	-	mg/kg	<5
Silicon (Si) - ICP	-	mg/kg	<10
Aluminium + Silicon (Al+Si)	-	mg/kg	<15
ULO metals content (a)	-	-	free of
_Zinc (Zn) - ICP	-	mg/kg	17
_Phosphorus (P) - ICP	-	mg/kg	<1
_Calcium (Ca) - ICP	-	mg/kg	3

Unless specified, the latest version at our disposal of the test methods has been used.  
The results relate only to the items tested.

AUTHORIZATION

Certified to ISO 9001  
Trade Register Antwerp 333.309  
VAT nr. BE 0465.326.123

Jonathan Van Hecke (Lab Shiftleader)

All tests marked by (a)  
are accredited by  
BELAC ref. 486-TEST  
ISO/IEC 17025



Bureau Veritas Commodities Antwerp NV  
Romeynsweel 14  
2030 Antwerp  
Belgium

T: +32 (0)3 546 08 88  
E: [labco@bureauveritas.com](mailto:labco@bureauveritas.com)  
[commodities.bureauveritas.com](http://commodities.bureauveritas.com)




**BUREAU  
VERITAS**



## Certificate of Analysis

Our ref	<b>BEANT-25-11573-XXV1999884</b>	Asset	<b>Submitted Sample</b>
Location	<b>Not specified</b>	Seals	<b>None</b>
Product	<b>HFO 380 with XBEE additive</b>	Packed	<b>Plastic</b>
Reference id	<b>XBEE</b>	Submitted by	<b>Ourselves</b>
Sample received	<b>13-02-2026</b>	End of analysis	<b>13-03-2026</b>
Subject	<b>Submitted samples</b>		
Sample from	<b>Sample as received</b>		

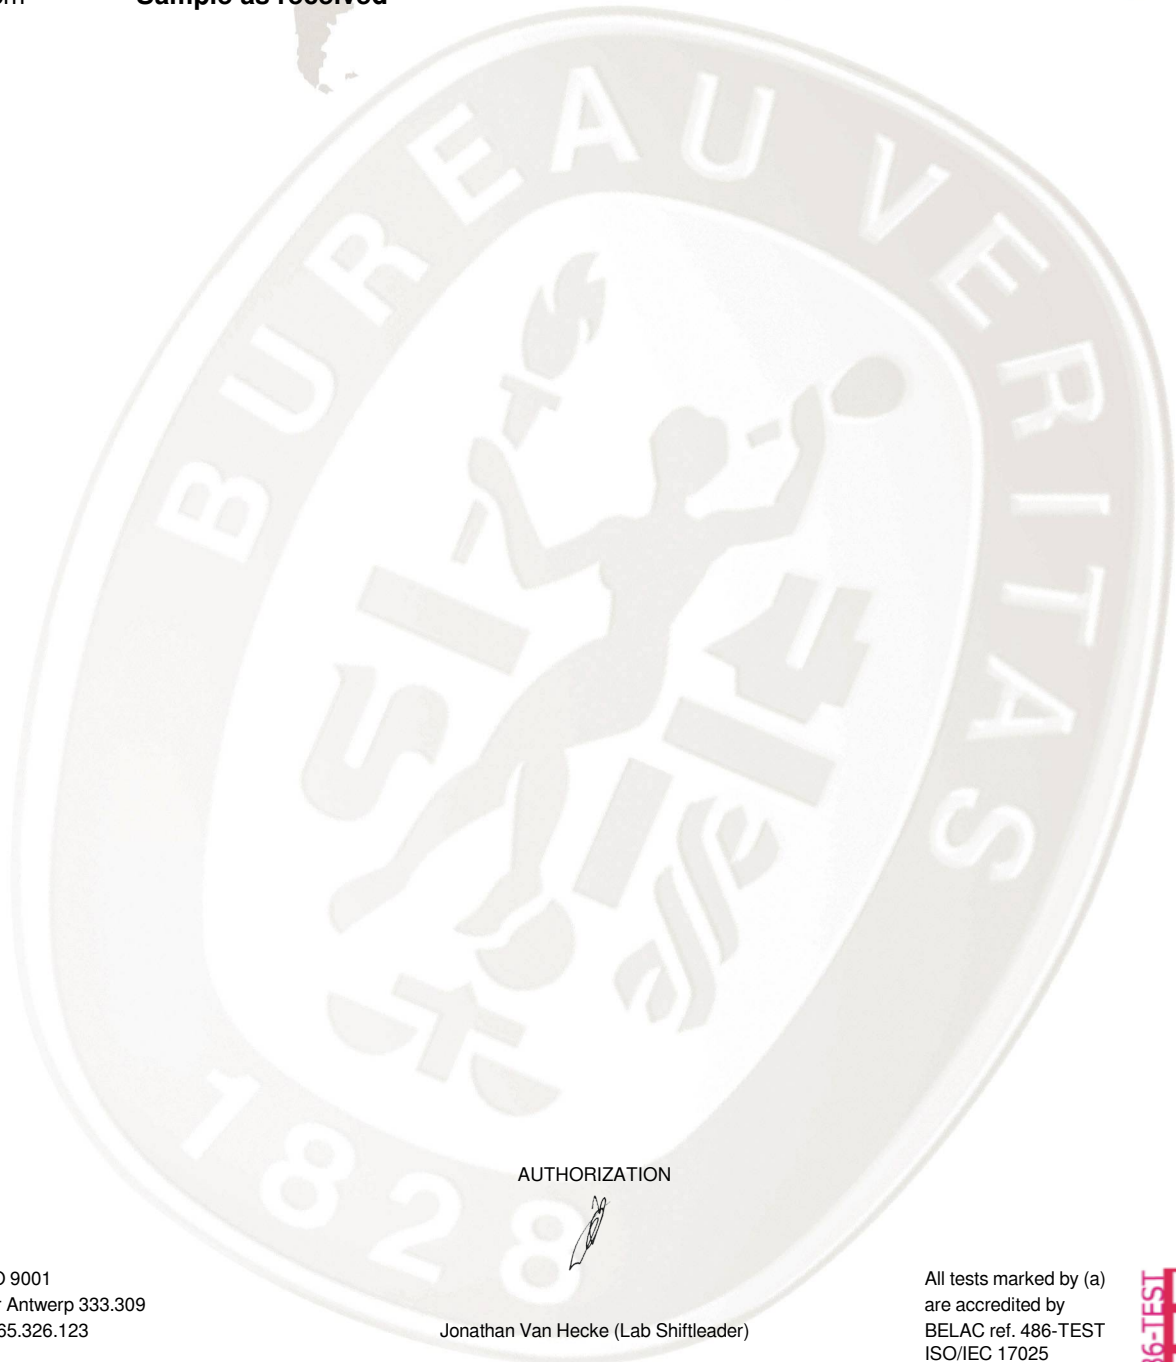

AUTHORIZATION

Certified to ISO 9001  
Trade Register Antwerp 333.309  
VAT nr. BE 0465.326.123

Jonathan Van Hecke (Lab Shiftleader)

All tests marked by (a)  
are accredited by  
BELAC ref. 486-TEST  
ISO/IEC 17025



All services are rendered in accordance with Bureau Veritas's General Terms and Conditions of Business, available on request or at <https://commodities.bureauveritas.com/general-conditions-of-service>.  
Laboratory Measurement Uncertainties are not taken into account for the evaluation of specification limits. If product is outside method scope; precision and accuracy of result cannot be guaranteed.

Method Validation data is available upon request.

v.XXV1999884.13032026.1724

p.2/2